

Fig. 1

possible victim channels (columns)

0 0 0 ٥ **o** *O* possible 0 Ç O oftender OO channels O O り \circ \Diamond (rows) 000 000 000 S 0 0 0 0 ٥ 0 0 0

Fig. 2

4

re-ordered
possible victim channels
(columns)

re-ordered
possible
offender
channels
(rows)




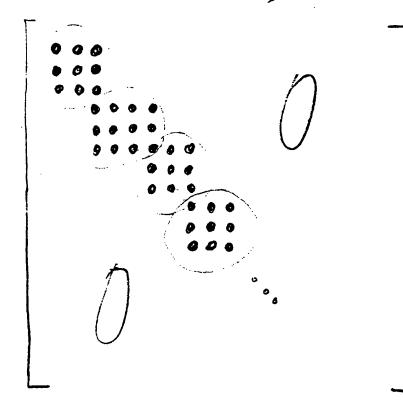


Fig. 3A

Fig. 3B

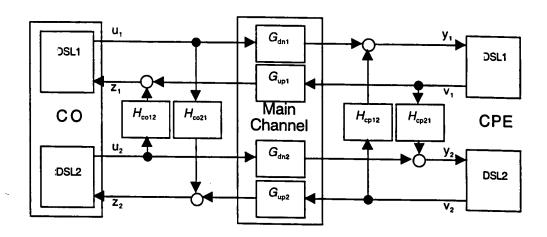


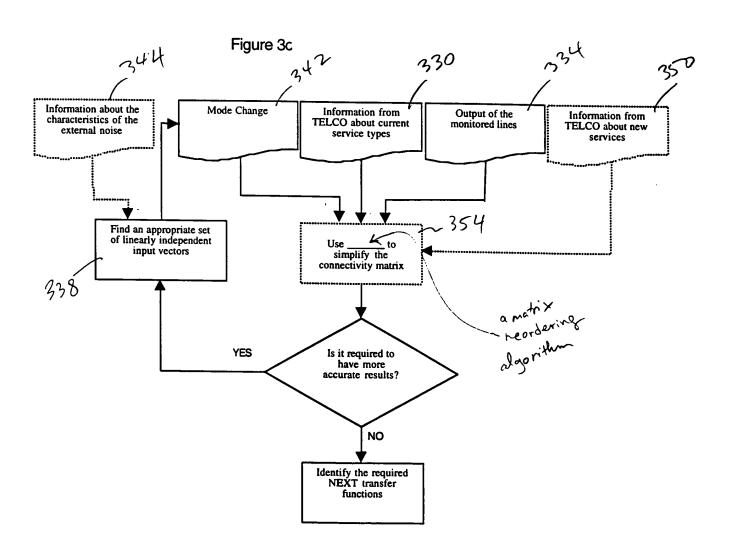

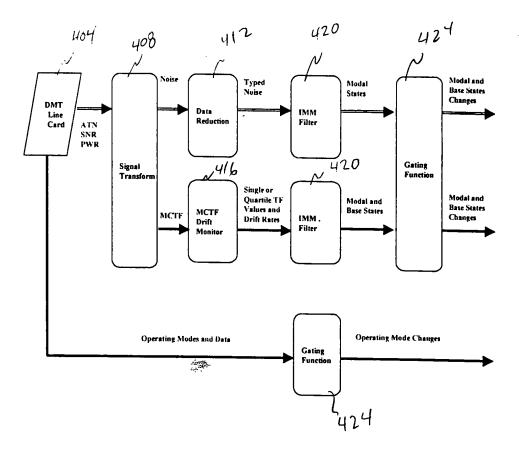


Event Detition Architecture

Fig.4 A

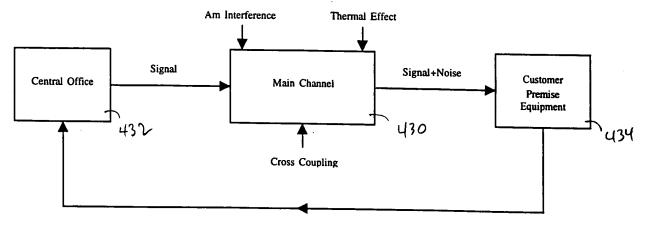

Report the attenuation, gain, and SNR of the selected bins for disturbance diagnosis

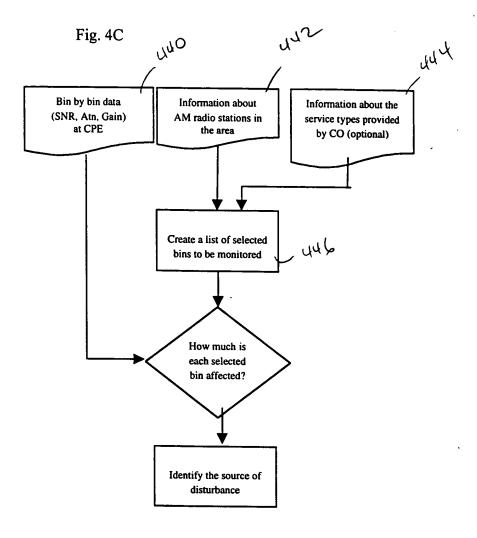


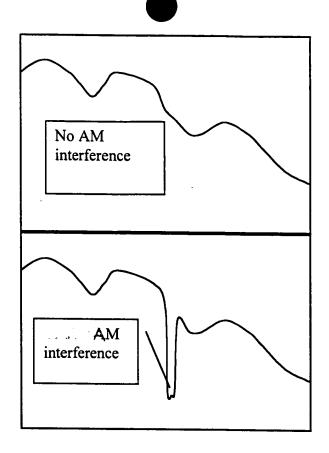


Fig. 4D

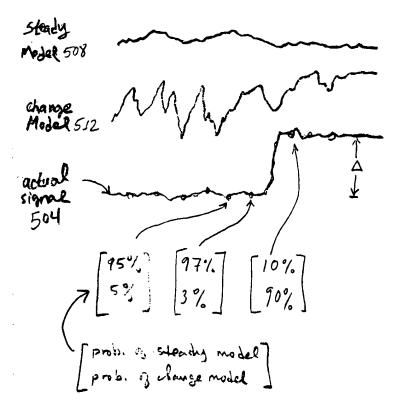

- time

Fig. 5A

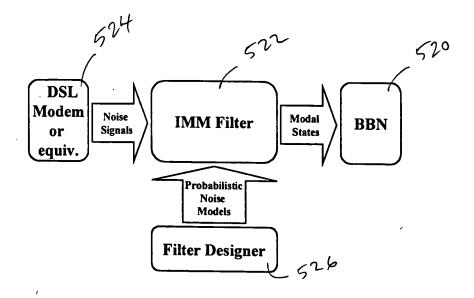


Fig. 5B

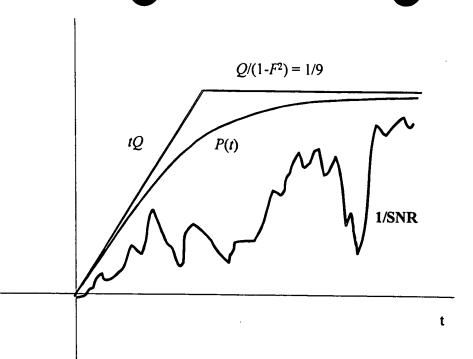


Fig. 5C



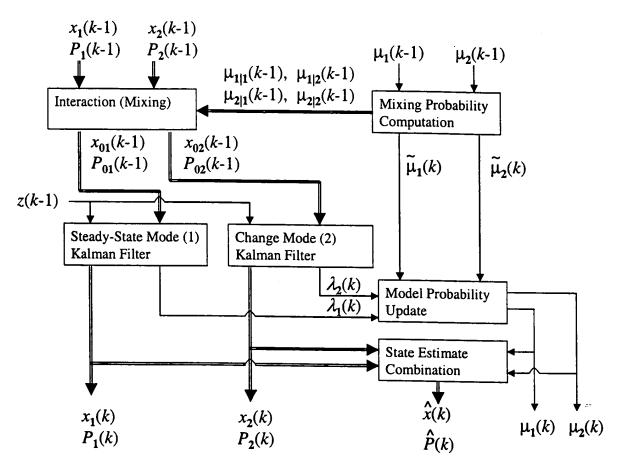


Fig. 5D

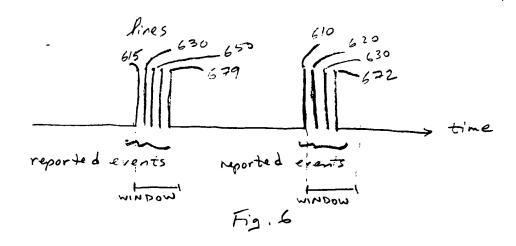


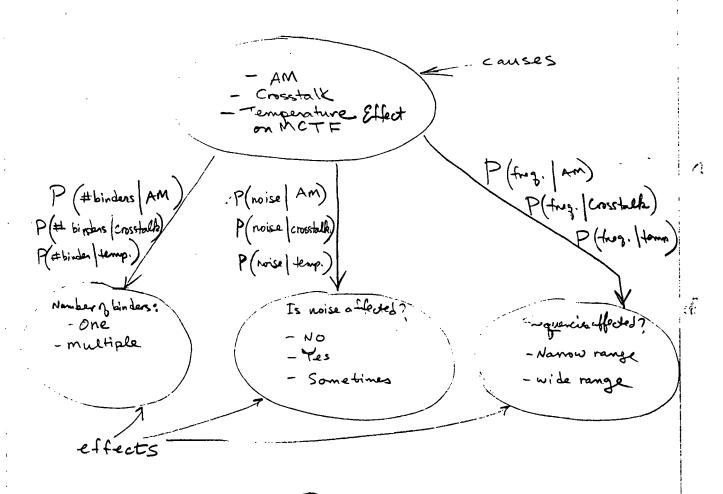

OBSERVATIONS


Fig. 7

out-of-domain crosstalk BBN

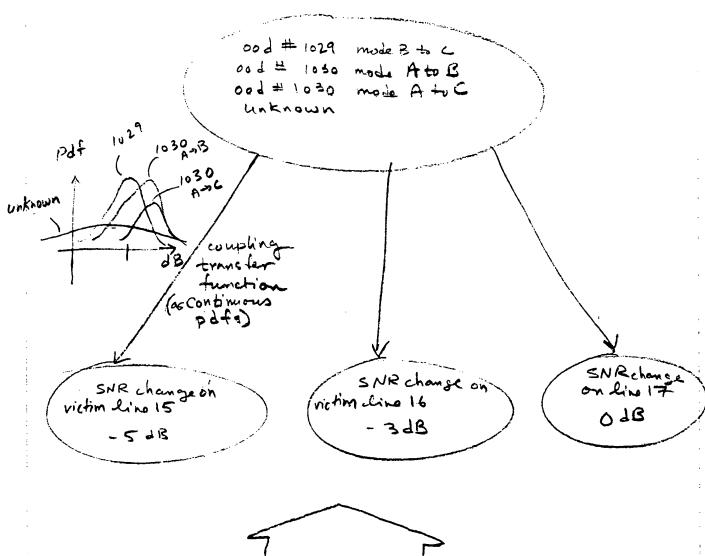

OBSERVATIONS

tis. 8

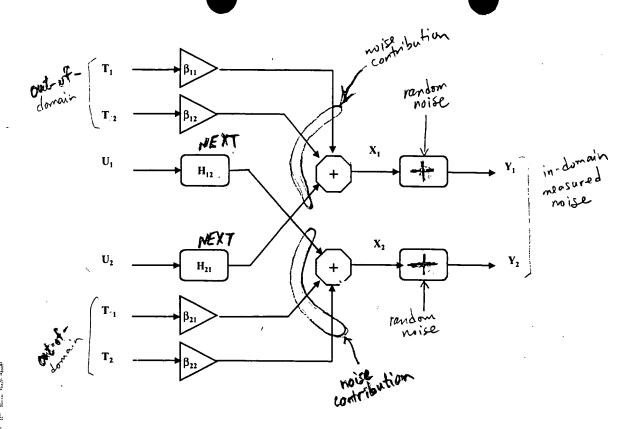

F19 9

Fig. 10

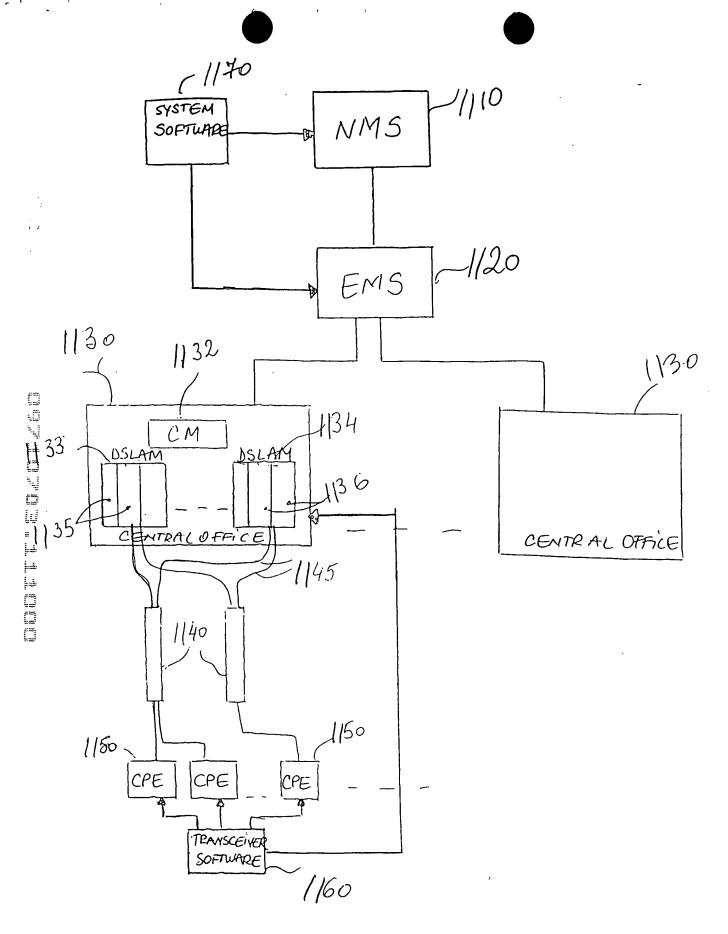


Fig. 11